

SERWIS  
32-652 Białowice,  
ul. Skochnica 120  
Tel. +48 33 8751920, +48 33 3300018  
+48 33 8751920, +48 33 8704700  
Monday - Friday  
7:00 - 16:00  
Saturday  
9:00 - 12:00

USER'S MANUAL  
R-8Z

TECH  
CONTROLLERS



TECH STEROWNIKI  
Spółka z ograniczoną odpowiedzialnością SP. z o.o.  
Biała Droga 31  
34-122 Wierzbica

## WARRANTY CARD

TECH company ensures to the Buyer proper operation of the device for the period of 24 months from the date of sale. The Guarantor undertakes to repair the device free of charge if the defects occurred through the manufacturer's fault. The device should be delivered to its manufacturer. Principles of conduct in the case of a complaint are determined by the Act on specific terms and conditions of consumer sale and amendments of the Civil Code (Journal of Laws of 5 September 2002).

CAUTION! THE TEMPERATURE SENSOR CANNOT BE IMMERSED IN ANY LIQUID (OIL ETC). THIS MAY RESULT IN DAMAGING THE CONTROLLER AND LOSS OF WARRANTY! THE ACCEPTABLE RELATIVE HUMIDITY OF THE CONTROLLER'S ENVIRONMENT IS 5÷85% REL.H. WITHOUT THE STEAM CONDENSATION EFFECT.  
THE DEVICE IS NOT INTENDED TO BE OPERATED BY CHILDREN.

Activities related to setting and regulation of the controller parameters described in the Instruction Manual and parts wearing out during normal operation, such as fuses, are not covered by warranty repairs. The warranty does not cover damages arising as a result of improper operation or through the user's fault, mechanical damage or damage created as a result of fire, flood, atmospheric discharges, overvoltage or short-circuit. The interference of an unauthorized service, wilful repairs, modifications and construction changes cause the loss of Warranty. TECH controllers have protective seals. Removing a seal results in the loss of Warranty.

The costs of unjustifiable service call to a defect will be borne exclusively by the buyer. The unjustifiable service call is defined as a call to remove damages not resulting from the Guarantor's fault as well as a call considered unjustifiable by the service after diagnosing the device (e.g. damage of the equipment through the fault of the client or not subject to Warranty), or if the device defect occurred for reasons lying beyond the device.

In order to execute the rights arising from this Warranty, the user is obliged, at his own cost and risk, deliver the device to the Guarantor along with a correctly filled-in warranty card (containing in particular the sale date, the seller's signature and a description of the defect) and sales proof (receipt, VAT invoice, etc.). The Warranty Card is the only basis for repair free of charge. The complaint repair time is 14 days. When the Warranty Card is lost or damaged, the manufacturer does not issue a duplicate.

.....  
seller's stamp

.....  
date of sale

## Safety

Before using the device for the first time the user should read the following regulations carefully. Not obeying the rules included in this manual may lead to personal injuries or controller damage. The user's manual should be stored in a safe place for further reference. In order to avoid accidents and errors it should be ensured that every person using the device has familiarized themselves with the principle of operation as well as security functions of the controller. If the device is to be sold or put in a different place, make sure that the user's manual is there with the device so that any potential user has access to essential information about the device. The manufacturer does not accept responsibility for any injuries or damage resulting from negligence; therefore, users are obliged to take the necessary safety measures listed in this manual to protect their lives and property.



We are committed to protecting the environment. Manufacturing electronic devices imposes an obligation of providing for environmentally safe disposal of used electronic components and devices. Hence, we have been entered into a register kept by the Inspection For Environmental Protection. The crossed-out bin symbol on a product means that the product may not be disposed of to household waste containers. Recycling of wastes helps to protect the environment. The user is obliged to transfer their used equipment to a collection point where all electric and electronic components will be recycled.



### WARNING

The device should be installed by a qualified electrician.

## Description

R-8z room regulator is intended for cooperation with L-8 external controller.

R-8z room regulators are installed in the heating zones. Temperature information sent by them to the external controller is used to control the thermostatic valves (by opening them when the room temperature is too low and closing them when the pre-set room temperature has been reached).

Current temperature is shown on LED display. The user may also change the preset temperature permanently or for a limited period of time directly from the sensor.

### Controller equipment:

- LED display
- built-in temperature sensor
- wall-mountable cover
- light sensor

## Installation

The controller should be installed by a qualified person.




### WARNING

Risk of fatal electric shock from touching live connections. Before working on the controller switch off the power supply and prevent it from being accidentally switched on.



### WARNING

Incorrect connection of the wires may damage the regulator!

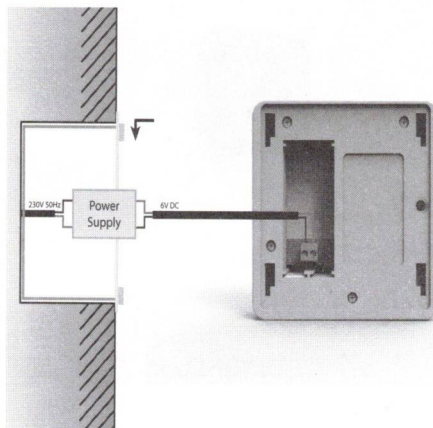

## How to register the room regulator in a particular zone

Each room regulator should be registered in one zone. Enter L-8 external controller menu and select Sensor in the submenu of a given zone (Zone/Registration/Sensor)- after pressing the Registration icon, press the communication button in a room regulator placed on the back of the sensor. If the registration process has been completed successfully, L-8 controller display shows an appropriate message whereas the room sensor display shows "Scs". In case of errors in the registration process, the room sensor display shows "Err".

The following rules must be kept in mind:

- once registered, the sensor cannot be unregistered, but only switched off in the menu of L-8 external controller by selecting Switched-off in the submenu of a given zone.
  - if the user attempts to assign a sensor to the zone to which other sensor has already been assigned, the first sensor becomes unregistered and it is replaced by the second one.
  - if the user attempts to assign a sensor which has already been assigned to a different zone, the sensor is unregistered from the first zone and registered in the new one.
- It is possible to set individual pre-set temperature value and weekly schedule for each room regulator assigned to a given zone. The settings may be configured both in the main menu of L-8 external controller (Main menu/Sensors) and via [www.emodul.eu](http://www.emodul.eu) (using ST-507 or WIFI RS). The pre-set temperature may also be adjusted directly from the room sensor using PLUS and MINUS button.

## How to change the pre-set temperature

The pre-set zone temperature may be adjusted directly from R-8z room sensor using PLUS and MINUS buttons.

During controller inactivity, the main screen displays current zone temperature. After pressing PLUS or MINUS, the current temperature is replaced with the pre-set temperature (the digits are flashing). Using PLUS and MINUS the user may adjust the preset temperature value. After setting desired value wait for 3 seconds – after this time the display shows a panel to define how long the new setting should apply.

Time settings may be adjusted:

- permanently – press PLUS button until Con appears on the screen (the pre-set value will apply all the time regardless of schedule settings)
- for a specified number of hours – press PLUS or MINUS until the desired number of hours appears on the screen e.g. 01h (the pre-set value will apply for a specified period of time; after that the weekly schedule will apply)
- if the temperature value defined in the weekly schedule settings should apply, press MINUS until the screen displays OFF.

## EU Declaration of Conformity

Hereby, we declare under our sole responsibility that ST-294 room regulator manufactured by TECH, headquartered in Wieprz Biała Droga 31, 34-122 Wieprz, is compliant with:

- Directive 2014/53/EU of the European parliament and of the Council of 16 April 2014. on the harmonisation of the laws of the Member States relating to the making available on the market of radio equipment;
- Directive 2009/125/EC establishing a framework for the setting of ecodesign requirements for energy-related products;
- the regulation by the Ministry of Economy of May 8, 2013 'concerning the essential requirements as regards the restriction of the use of certain hazardous substances in electrical and electronic equipment', implementing provisions of ROHS directive 2011/65/EU

For compliance assessment, harmonized standards were used:

PN-EN 60730-2-9 :2011 par. 3.1a Safety of use

ETSI EN 301 489-1 V2.1.1 (2017-02) par.3.1b Electromagnetic compatibility

ETSI EN 301 489-3 V2.1.1 (2017-03) par.3.1 b Electromagnetic compatibility

ETSI EN 300 220-2 V3.1.1 (2017-02) par.3.2 Effective and coherent use of radio spectrum

ETSI EN 300 220-1 V3.1.1 (2017-02) par.3.2 Effective and coherent use of radio spectrum

**PAWEŁ JURA**  
  
**JANUSZ MASTER**  
WŁAŚCICIELE TECH SPÓŁKA Z OGRANICZONĄ ODPOWIEDZIALNOŚCIĄ SP. K.

Wieprz, 06.12.2018