


Ball valves TRYTON

Full-port ball valve with nut on stem and aluminium butterfly (female-male version)

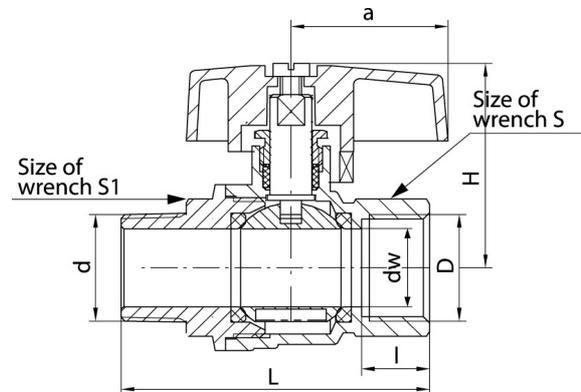

DN	Code	Dimensions										EAN13
		Size	D	l	dw	L	d	a	H	S	S1	
10	1451170	3/8"	G3/8	12	10	50	R3/8	30	36	20	20	5907451941850
15	1452170	1/2"	G1/2	13	15	59	R1/2	30	42	25	25	5907451941881
20	1453170	3/4"	G3/4	15	20	65	R3/4	40	47	31	28	5907451941942
25	1454170	1"	G1	16	25	77	R1	40	50	40	39	5907451941997

Product usage:

In the water supply systems for hot and cold water, heating systems, solar systems with glycol water solution as shut-off valves to open and close the flow.

Type:

Straight ball valves

Technical data/Operating parameters:

Max pressure: 4,0 MPa,
Max temperature: 140°C

Guarantee:

25-year

Used materials:

body, nut, ball, stem, adjustable stem nut: brass;
ball and stem seal: PTFE (teflon);
butterfly handle: aluminium alloy

Finish:

body, nut: nickel; ball: chrome