


Ball valves TRYTON

Nickel plated full-port ball valve with nut on stem and aluminium butterfly handle (female-female version)

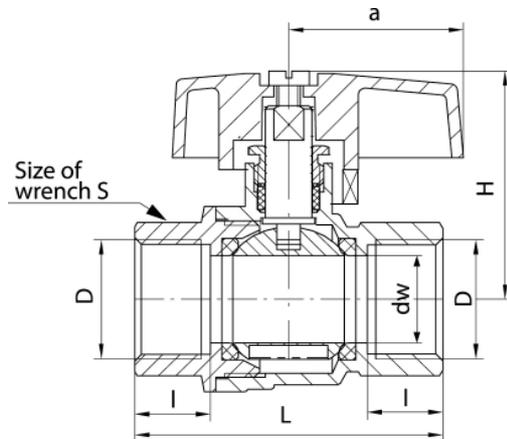

DN	Code	Dimensions								EAN13
		Size	D	l	dw	L	a	H	S	
15	1452210	1/2"	G1/2	13	15	53	30	42	25	5907451941911
20	1453150	3/4"	G3/4	15	20	60	40	47	31	5907451941928
25	1454150	1"	G1	16	25	70	40	50	40	5907451941973

Product usage:

In the water supply systems for hot and cold water, heating systems, solar systems with glycol water solution as shut-off valves to open and close the flow.

Type:

Straight ball valves

Technical data/Operating parameters:

Max pressure: 4,0 MPa,
Max temperature: 140°C

Guarantee:

25-year

Used materials:

body, nut, ball, stem, adjustable stem nut: brass;
ball and stem seal: PTFE (teflon);
butterfly handle: aluminium alloy

Finish:

body, nut: nickel; ball: chrome